

2INCH PANEL PRINTER

PORTI-AP60



Features


- Ultra small size rack mount printer.
- Very silent printing thru direct thermal printing method
- High speed(50mm/sec)
- UART or RS-485 or Parallel interface.
- Auto cutting.
- Support text and graphic printing.
- Support bit-image (logo) download.
- Easier paper loading by CLAMSHELL design.
- Easier maintenance with self-diagnostics.

Auto cutting



Applications

Test & Measurement, Transportation, Health care, ATM, Coupon, Self service, Kiosks, Electronic voting systems.

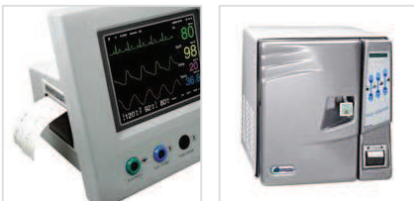

Specification

Item	Specification
Printing method	Direct thermal line printing
Characters per line	42cpl (MAX)
Characters size	Eng : 9x24 dots, 12x24 dots Kor : 16x24 dots [24x24 dots]
Optional Characters	Simplified/Traditional Chinese, Arabic, Cyrillic, Russian, Turkish, Greek, Japanese, Persian, Latin9 and Others upon request.
Resolution	203 dpi, 8 dots/mm
Print width	2-inch (48mm, 384 dots)
Printing speed	50 mm/sec (MAX)
Dimensions	107.2 x 109.1 x 90.6 mm
Weight	427g
Interface	UART or RS-485 or Parallel
Paper supplied	Thermal roll paper (57mm wide, 60Ø) , Paper thickness : 60 ± 5µm
Barcodes	1-dimension:Code128, EAN 128, Code39, I2/5, Code93, UPC, EAN, KAN, JAN, CODABAR 2-dimension:PDF417, QR Code, DATA Matrix
Driver	Microsoft Windows XP / VISTA / 7 , Windows CE, Linux, Android OS driver compatible
Input power	12VDC, Standby 60mA and MAX 3A (Cutter type : 5V) 24VDC, Standby 60mA and MAX 3A (Cutter type : 24V)